



Lim i pribor za transformatore

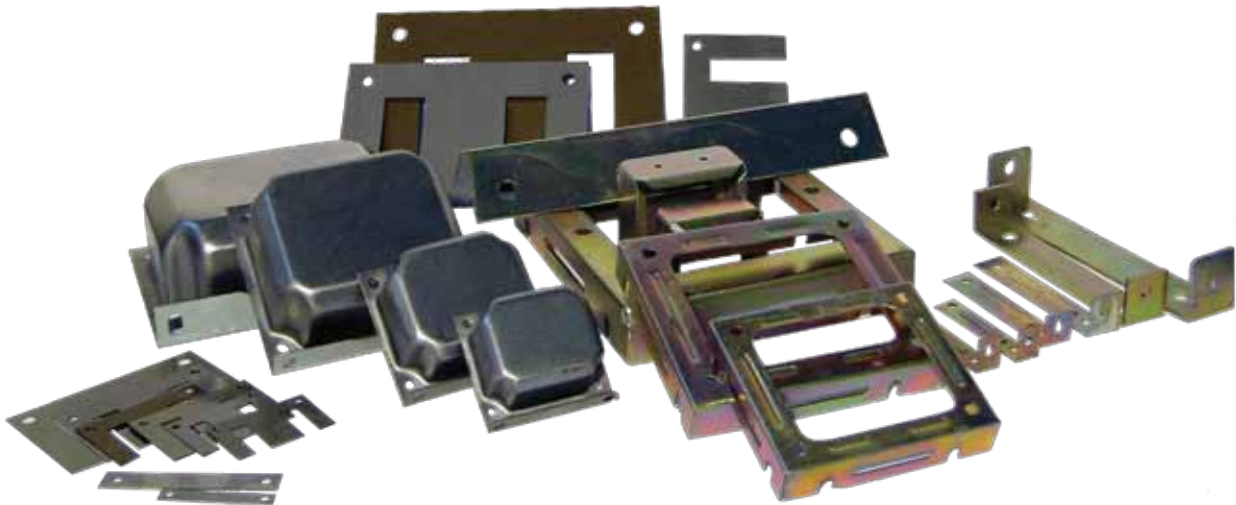

Karakteristike:

- > Lim za izradu transformatora dimenzije od EI 20 do EI 240, metalni držači, poklopci i ostali montažni pribor

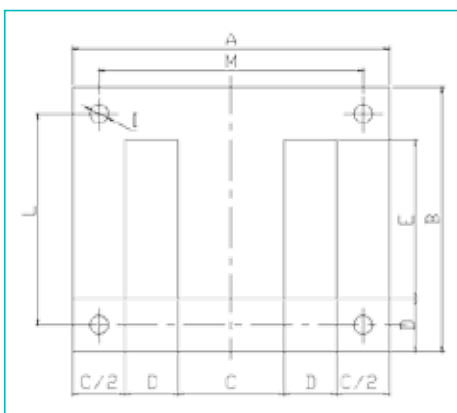

MODEL	A	B	C	D	E	I	L	M	Težina x 10 mm/gr
EL 42	42	35	14	7	21	3.5	28	35	85
EL 48	48	40	16	8	24	3.5	32	40	114
EL 60	60	50	30	10	30	4	40	50	186
EL 75	75	62.5	25	12.5	37.5	4.2	50	62.5	283
EL 84	84	70	28	14	42	5	56	70	320
EL 96	96	80	32	16	48	5.5	64	80	467
EL 108	108	90	36	18	54	6	72	90	570
EL 120	120	100	40	20	60	7	80	100	715
EL 135	135	112.5	45	22.5	67.5	7.5	90	112.5	905
EL 150	150	125	50	25	75	8	100	125	1063
EL 180	180	150	60	30	90	9.5	120	150	1640
EL 192	192	160	64	32	96	9.5	128	160	1864
EL 240	240	200	80	40	120	11.5	160	200	2940

MARTINpower